

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 574 936 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
02.05.2002 Bulletin 2002/18

(51) Int Cl.7: **G06K 9/66**

(21) Application number: **93109762.0**

(22) Date of filing: **18.06.1993**

(54) Method and apparatus for input classification using non-spherical neurons

Verfahren und Vorrichtung zur Eingabeklassifizierung mit nichtkugeligen Neuronen

Méthode et dispositif pour classification d'entrée utilisant des neurones non-sphériques

(84) Designated Contracting States:
BE DE FR GB

(30) Priority: **19.06.1992 US 901429**

(43) Date of publication of application:
22.12.1993 Bulletin 1993/51

(60) Divisional application:
01125304.4 / 1 197 913
01125305.1 / 1 197 914

(73) Proprietor: **UNITED PARCEL SERVICE OF
AMERICA, INC.**
Atlanta, GA 30346 (US)

(72) Inventors:
• **Moed, Michael C.**
Norwalk, Connecticut 06851 (US)
• **Lee, Chih-Ping**
Danbury, Connecticut 06810 (US)

(74) Representative: **Beetz & Partner Patentanwälte**
Steinsdorfstrasse 10
80538 München (DE)

(56) References cited:
• **1991 INT. SYMP. ON CIRCUITS AND SYSTEMS**
vol. 1/5, 11 June 1991, SINGAPORE page 356-9
XP000384785 Y. MIYANAGA ET AL 'Parallel and
adaptive clustering method suitable for a VLSI
system'
• **TRAITEMENT DU SIGNAL vol. 8, no. 6, 1991,**
PARIS, FR pages 423 - 30 XP000360600 J MINOT
ET AL 'Authentification dynamique de
signatures par réseaux de neurones'
• **1991 IEEE INT. SYMP. ON CIRCUITS AND**
SYSTEMS vol. 2/5, 11 June 1991, SINGAPORE
page 1176-9 XP000370414 I-C JOU ET AL 'A
hyperellipsoid neural network for pattern
classification'
• **PATTERN RECOGNITION LETTERS vol. 13, no.**
5, May 1992, AMSTERDAM NL pages 325 - 9
XP000278617 G. S. LIM ET AL 'Adaptive
quadratic neural nets'

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 574 936 B1

Description

[0001] The invention relates to a classification method and apparatus, particularly to methods and apparatuses for classifying optically acquired character images.

[0002] In the field of package shipping, packages are routed from origins to destinations throughout the world according to destination addresses typed on shipping labels applied to these packages. In order to route packages, it is desirable to use automated optical character classification systems that can read those addresses. Such a classification system must be able to classify characters as quickly as possible. Conventional optical character classification systems using spherical neurons, such as those disclosed in U.S. Patent No. 4,326,259 (Cooper et al.), may be unable to execute the processing requirements presented by certain applications without a substantial investment in hardware.

[0003] The paper "Authentification dynamique de signatures par réseaux de neurones" in "Traitement du Signal", 8/1991, pages 423 and following describes a signature authentication method based on hand-writing. Proposed is a method in which after a signal normalization dissimilarity measures between signatures are extracted. These measures are then processed by a neural network.

[0004] The paper "Parallel and adaptive clustering method ..." in "1991 INT. SYMP. ON CIRCUITS AND SYSTEMS", Vol. 1/5, June 11, 1991, pages 356 and following, by Y. Miyana et al., discloses a two-functional network in which adaptive methods are implemented for sophisticated recognition and clustering. In a first subnet, clustering is based on Mahalanobis distance in order to determine a similarity vector, based on which an optimum label is determined in a second subnetwork consisting of nodes associated to specific labels.

[0005] The paper "A hyperellipsoid neural network ..." in "1991 IEEE INT. SYMP. ON CIRCUITS AND SYSTEMS", Vol. 2/5, June 11, 1991, pages 1176 and following, by Jou Wu, Tsay and others, discloses a distance-based neural network for pattern classification in which for training purposes a hyperellipsoid is constructed for each training pattern. Here it is tried to merge the hyperellipsoids of the same classes without interfering the hyperellipsoids of other classes.

[0006] It is the object of the invention to provide a classification method and apparatus capable of reliably classifying an input into one of a plurality of possible outputs.

[0007] This object is accomplished in accordance with the features of the independent claims. Dependent claims are directed on preferred embodiments of the invention.

Figs. 1(a), 1(b), 1(c), and 1(d) are bitmap representations of a nominal letter "O", a degraded letter "O", a nominal number "7", and a degraded letter "7", respectively;

Fig. 2 is a graphical depiction of a 2-dimensional feature space populated with 8 elliptical neurons that may be employed by the classification system of the present invention to classify images of the letters A, B, and C;

Fig. 3 is a process flow diagram for classifying inputs according to a preferred embodiment of the present invention;

Fig. 4 is a schematic diagram of part of the classification system of Fig. 3;

Fig. 5 is a process flow diagram for generating neurons used by the classification system of Fig. 3; and

Fig. 6 is a schematic diagram of a classification system that uses cluster classifiers for classifying inputs according to a preferred embodiment of the present invention.

[0008] The present invention includes a system for optical character recognition, but, more generally, the invention covers a classification system for classifying an input as one of a defined set of possible outputs. For example, where the input is an optically acquired image representing one of the 26 capital letters of the English alphabet, the classification system of the present invention may be used to select as an output that capital letter that is associated with the input image. The classification system of the present invention is discussed below in connection with Figs. 1(a), 2, 3, and 4.

[0009] As background art, this specification also includes a system for "training" the classification system. This training system is preferably operated off line prior to deployment of the classification system. In the character recognition example, the training system accepts input images representative of known characters to "learn" about the set of possible outputs into which unknown images will eventually be classified. The training system is discussed below in connection with Fig. 5.

[0010] As background art, this specification also includes a system for training the classification system based on ordering the training inputs according to the relative quality of the training inputs. This system for training is discussed below in connection with Figs. 1(a), 1(b), 1(c), and 1(d).

[0011] As background art, this specification also includes a system for adjusting the locations and shapes of neurons generated during the training systems.

[0012] As background art, this specification also includes a classification system employing a hierarchical network of top-level and lower level cluster classifiers. The top-level classifier classifies inputs into one of a plurality of output clusters, where each output cluster is associated with a subset of the set of possible outputs. A cluster classifier, associated with the output cluster identified by the top-level classifier, then classifies the input as corresponding to one

of the possible outputs. This classification system is discussed below in connection with Fig. 1(a), 1(b), 1(c), and 1(d).

[0013] As background art, this specification also includes a neural system of classifying inputs that combines two subsystems. One subsystem counts the number of neurons that encompass a feature vector representing a particular input for each of the possible outputs. If one of the possible outputs has more neurons encompassing the feature vector than any other possible output, then the system selects that possible output as corresponding to that input. Otherwise, the second subsystem finds the neuron that has the smallest value for a particular distance measure for that feature vector. If that value is less than a specified threshold then the system selects the output associated with that neuron as corresponding to the input. This neural system is discussed below in connection with Figs. 1(a), 2, 3, and 4.

[0014] Referring now to Fig. 1(a), there is shown a bitmap representation of a nominal letter "O". When the classification system of the present invention classifies optically acquired character images, each character image to be classified may be represented by an input bitmap, an $(m \times n)$ image array of binary values as shown in Fig. 1(a). In a preferred embodiment, the classification system of the present invention generates a vector in a k -dimensional feature space from information contained in each input bitmap. Each feature vector F has feature elements f_j , where $0 \leq j \leq k-1$. The dimension of the feature space, k , may be any integer greater than one. Each feature element f_j is a real value corresponding to one of k features derived from the input bitmap.

[0015] The k features may be derived from the input bitmap using conventional feature extraction functions, such as, for example, the Grid or Hadamard feature extraction function. The feature vector F represents a point in the k -dimensional feature space. The feature elements f_j are the components of feature vector F along the feature-space axes of the k -dimensional feature space. For purposes of this specification, the term "feature vector" refers to a point in feature space.

[0016] In a preferred embodiment, a discriminant analysis transform may be applied to Grid-based or Hadamard-based feature vectors to define the feature space. In this embodiment, the separation between possible outputs may be increased and the dimensionality of the feature vector may be reduced by performing this discriminant analysis in which only the most significant Eigenvectors from the discriminant transformation are retained.

[0017] The classification system compares a feature vector F , representing a particular input image, to a set of neurons in feature space, where each neuron is a closed k -dimensional region or "hyper-volume" in the k -dimensional feature space. For example, when $(k=2)$, each neuron is an area in a 2-dimensional feature space, and when $(k=3)$, each neuron is a volume in a 3-dimensional feature space. Fig. 2 shows a graphical depiction of an exemplary 2-dimensional feature space populated with eight 2-dimensional neurons.

[0018] In a preferred classification system, the boundary of at least one of the neurons populating a k -dimensional feature space is defined by at least two axes that have different lengths. Some of these neurons may be generally represented mathematically as:

$$\sum_{j=0}^{k-1} \frac{|c_j - g_j|^m}{(b_j)^m} \leq A, \quad (1)$$

where c_j define the center point of the neuron, b_j are the lengths of the neuron axes, and m and A are positive real constants. In a preferred embodiment, at least two of the neuron axis are of different length. The values g_j that satisfy Equation (1) define the points in feature space that lie within or on the boundary of the neuron. Those skilled in the art will understand that other neurons within the scope of this invention may be represented by other mathematical expressions. For example, a neuron may be defined by the expression:

$$\max_{j=0}^{k-1} \frac{|c_j - g_j|}{|b_j|} \leq 1, \quad (2)$$

where the function "MAX" computes the maximum value of the ratio as j runs from 0 to $k-1$. Neurons defined by Equation (2) are hyper-rectangles.

[0019] In a preferred embodiment, the neurons are hyper-ellipses in the k -dimensional feature space. A hyper-ellipse is any hyper-volume defined by Equation (1), where $(m=2)$ and $(A=1)$. More particularly, a hyper-ellipse is defined by the function:

$$\sum_{j=0}^{k-1} \frac{|c_j - g_j|^2}{(b_j)^2} \leq 1, \quad (3)$$

where c_j define the hyper-ellipse center point, b_j are the hyperellipse axis lengths, and the values g_j that satisfy Equation (3) define the points that lie within or on the hyper-ellipse boundary. When all of the axes are the same length, the hyper-ellipse is a hyper-sphere. In a preferred embodiment of the present invention, in at least one of the neurons, at least two of the axes are of different length. By way of example, there is shown in Fig. 2 elliptical neuron 1, having center point (c_0^1, c_1^1) , and axis b_0^1, b_1^1 of different length. In a preferred embodiment, the axes of the neurons are aligned with the coordinate axes of the feature space. Those skilled in the art will understand that other neurons having axes that do not all align with the feature-space axes are within the scope of the invention.

[0020] Each neuron is associated with a particular possible output. For example, each neuron may correspond to one of the 26 capital letters. Each neuron is associated with only one of the possible outputs (e.g., letters), but each possible output may have one or more associated neurons. Furthermore, neurons may overlap one another in feature space. For example, as shown in Fig. 2, neurons 0, 1, and 7 correspond to the character "A", neurons 2, 3, 5, and 6 correspond to the character "B", and neuron 4 corresponds to the character "C". Neurons 1 and 7 overlap, as do neurons 2, 3, and 6 and neurons 3, 5, and 6. In an alternative embodiment (not shown), neurons corresponding to different possible outputs may overlap. The classification system may employ the neurons of Fig. 2 to classify input images representative of the letters A, B, and C.

[0021] Referring now to Fig. 3, there is shown a process flow diagram of classification system 300 for classifying an input (e.g., a bitmap of an optically acquired character image) as one of a set of possible outputs (e.g., characters) according to a preferred embodiment of the present invention. In the preferred embodiment shown in Fig. 3, the neurons in classification system 300 are processed in parallel. In an alternative embodiment (not shown), the neurons of classification system 300 may be processed in series. Means 302 is provided for receiving an input image bitmap and generating a feature vector that represents information contained in that bitmap. Means 304 and 306 are provided for comparing the feature vector generated by means 302 to a set of neurons, at least one of which has two or more axes of different length. Classification system 300 selects one of the possible outputs based upon that comparison.

[0022] In a preferred embodiment, classification system 300 classifies optically acquired character bitmaps using a network of hyper-elliptical neurons. Means 302 of classification system 300 receives as input the bitmap of an optically acquired character image to be classified and generates a corresponding feature vector F . Means 304 then determines an "elliptical distance" r_x as a function of the center and axes of each of the E_{num} hyper-elliptical neurons x in the network and feature vector F , where:

$$r_x = \sum_{j=0}^{k-1} \frac{|f_j - c_j^x|^2}{(b_j^x)^2}, \quad (4)$$

In Equation (4), c_j^x and b_j^x define the center point and axis lengths, respectively, of neuron x , where x runs from 0 to $E_{num}-1$, and f_j are the elements of feature vector F . Those skilled in the art would recognize that distance measures different from that of Equation (4) may also be used.

[0023] Means 306 determines which, if any, of the E_{num} neurons encompass feature vector F . A neuron encompasses a feature vector -- and may be referred to as an "encompassing neuron" -- if the feature vector lies inside the boundary that defines the neuron in feature space. For hyper-ellipses, neuron x encompasses feature vector F , if $(r_x < 1)$. If $(r_x = 1)$, feature vector F lies on the boundary of neuron x , and if $(r_x > 1)$, feature vector F lies outside neuron x . Since neurons may overlap in feature space, a particular feature vector may be encompassed by more than one neuron. In Fig. 2, feature vector F_g , corresponding to a particular input image, is encompassed by neurons 2 and 6. Alternatively, a feature vector may lie inside no neurons, as in the case of feature vector F_h of Fig. 2, which corresponds to a different input image.

[0024] Means 308 finds the "closest" neuron for each possible output. As described earlier, each neuron is associated with one and only one possible output, but each possible output may have one or more neurons associated with it. Means 308 analyzes all of the neurons associated with each possible output and determines the neuron "closest" to feature vector F for that output. The "closest" neuron will be the one having the smallest "distance" measure value r_x . In the example of feature vector F_g of Fig. 2, means 308 will select neuron 1 as being the "closest" neuron to feature vector F_g for the character "A". It will also select neuron 2 as the "closest" neuron for character "B" and neuron 4 for

character "C".

[0025] Means 310 in Fig. 3 counts votes for each possible output. In a first preferred embodiment, each neuron that encompasses feature vector F is treated by means 310 as a single "vote" for the output associated with that neuron. In an alternative preferred embodiment discussed in greater detail with respect to Equation (7) below, each neuron that encompasses feature vector F is treated by means 310 as representing a "weighted vote" for the output associated with that neuron, where the weight associated with any particular neuron is a function of the number of training input feature vectors encompassed by that neuron. In a preferred embodiment, means 310 implements proportional voting, where the weighted vote for a particular neuron is equal the number of feature vectors encompassed by that neuron. For each possible output, means 310 tallies all the votes for all the neurons that encompass feature vector F . There are three potential types of voting outcomes: either (1) one output character receives more votes than any other output character, (2) two or more output characters tie for the most votes, or (3) all output characters receive no votes, indicating the situation where no neurons encompass feature vector F . In Fig. 2, feature vector F_g may result in the first type of voting outcome: character "B" may receive 2 votes corresponding to encompassing neurons 2 and 6, while characters "A" and "C" receive no votes. Feature vector F_h of Fig. 2 results in the third type of voting outcome with each character receiving no votes.

[0026] Means 312 determines if the first type of voting outcome resulted from the application of means 310 to feature vector F . If only one of the possible output characters received the most votes, then means 312 directs the processing of classification system 300 to means 314, which selects that output character as corresponding to the input character bitmap. Otherwise, processing continues to means 316. For feature vector F_g in Fig. 2, means 312 determines that character "B" has more votes than any other character and directs means 314 to select "B" as the character corresponding to feature vector F_g . For feature vector F_h in Fig. 2, means 312 determines that no single character received the most votes and directs processing to means 316.

[0027] Means 316 acts as a tie-breaker for the second and third potential voting outcome in which no outright vote-leader exists, either because of a tie or because the feature vector lies inside no neurons. To break the tie, means 316 selects that neuron x which is "closest" in elliptical distance to feature vector F and compares r_x to a specified threshold value θ^m . If $(r_x \leq \theta^m)$, then means 318 selects the output character associated with neuron x as corresponding to the input character bitmap. Otherwise, the tie is not broken and classification system 300 selects no character for the input image. A "no-character-selected" result is one of the possible outputs from classification system 300. For example, if classification system 300 is designed to recognize capital letters and the input image corresponds to the number "7" a no-character-selected result is an appropriate output.

[0028] Threshold value θ^m may be any number greater than 1 and is preferably about 1.25. As described earlier, when feature vector F is inside neuron x , then $(r_x < 1)$, and when feature vector F is outside neuron x , then $(r_x > 1)$. If the voting result from means 310 is a tie for the most non-zero votes, then means 316 will select the output character associated with the encompassing neuron having a center which is "closest" in elliptical "distance" feature vector F . Alternatively, if there are no encompassing neurons, means 316 may still classify the input bitmap as corresponding to the output character associated with the "closest" neuron X , if $(r_x \leq \theta^m)$. Using a threshold value θ^m of about 1.25 establishes a region surrounding each neuron used by means 316 for tie-breaking. In Fig. 2, feature vector F_h will be classified as character "C" if the "distance" measure r_4 is less than the threshold value θ^m ; otherwise, no character is selected.

[0029] Referring now to Fig. 4, there is shown a schematic diagram of classification system 400 for classifying inputs as corresponding to a set of s possible outputs. Classification system 400 may perform part of the processing performed by classification system 300 of Fig. 3. Classification system 400 accepts feature vector F , represented by feature elements $(f_0, f_1, \dots, f_{k-1})$, and generates values q^i and q^m that act as pointers and/or flags to indicate the possible output to be selected. Classification system 400 includes four subsystem levels: input level 402, processing level 404, output level 406, and postprocessing level 408.

[0030] Input level 402 includes the set i of k input processing units i_j , where j runs from 0 to $k-1$. Each input processing unit i_j receives as input one and only one element f_j of the feature vector F and broadcasts this value to processing level 404. Input level 402 functions as a set of pass-through, broadcasting elements.

[0031] Processing level 404 includes the set E of E_{num} elliptical processing units e_x , where x runs from 0 to $E_{\text{num}}-1$. Each elliptical processing unit e_x is connected to and receives input from the output of every input processing unit i_j of input level 402. Elliptical processing unit e_x implements Equation (4) for neuron x of classification system 300 of Fig. 3. Like neuron x of classification system 300, each elliptical processing unit e_x is defined by two vectors of internal parameters: B^x and C^x . The elements of vector B^x are the lengths of the axes of neuron x , where:

$$B^x = (b_0^x, b_1^x, \dots, b_{k-1}^x)^T, \quad (5)$$

and the elements of vector C^x are the coordinates of the center point of neuron x , where:

$$C^x = (c_0^x, c_1^x, \dots, c_{k-1}^x). \quad (6)$$

[0032] Each elliptical processing unit e_x of processing level 404 computes the distance measure r_x from feature vector F to the center of neuron x . Processing level 404 is associated with means 304 of classification system 300. If $(r_x < 1)$, then elliptical processing unit e_x is said to be activated; otherwise, elliptical processing unit e_x is not activated. In other words, elliptical processing unit e_x is activated when neuron x encompasses feature vector F . Each elliptical processing unit e_x broadcasts the computed distance measure r_x to only two output processing units of output level 406.

[0033] Output level 406 includes two parts: output-total part 410 and output-minimize part 412. Output-total part 410 contains the set O^t of s output processing units o_n^t , and output-minimize part 412 contains the set O^m of s output processing units o_n^m , where n runs from 0 to $s-1$, where s is also the number of possible outputs for which classification system 400 has been trained. For example, when classifying capital letters, $s=26$. Each processing unit pair (o_n^t, o_n^m) is associated with only one possible output and vice versa.

[0034] Each elliptical processing unit e_x of processing level 404 is connected to and provides output to only one output processing unit o_n^t of output-total part 410 and to only one output processing unit o_n^m of output-minimize part 412. However, each output processing unit o_n^t and each output processing unit o_n^m may be connected to and receive input from one or more elliptical processing units e_x of processing level 404. These relationships are represented by connection matrices W^t and W^m , both of which are of dimension $(s \times E_{num})$. In a preferred embodiment, if there is a connection between elliptical processing unit e_x of processing level 400 and output processing unit o_n^t of output-total part 410 of output level 406, an entry w_{nx}^t in connection matrix W^t will have a value that is equal to the number of training input feature vectors encompassed by neuron x ; otherwise, it has value 0. In a further preferred embodiment, entry w_{nx}^t has a value 1 if there is a connection between elliptical processing unit e_x and output processing unit o_n^t .

[0035] Connection matrix W^m represents the connections between processing level 404 and output-minimize part 412 of output level 406 and is related to connection matrix W^t . An entry w_{nx}^m in connection matrix W^m will have a value of 1 for every entry w_{nx}^t in connection matrix W^t that is not zero. Otherwise, entry w_{nx}^m will have a value of 0.

[0036] Each output processing unit o_n^t in output-total part 410 computes an output value o_n^t , where:

$$o_n^t = \sum_{x=0}^{E_{num}-1} w_{nx}^t T(r_x), \quad (7)$$

where the function $T(r_x)$ returns the value 0 if $(r_x > 1)$; otherwise, it returns the value 1. In other words, the function $T(r_x)$ returns the value 1 if elliptical processing unit e_x of processing level 404 is activated. Output processing unit o_n^t counts the votes for the possible output with which it is associated and outputs the total. Output-total part 410 of output level 406 is associated with means 306 and means 310 of classification system 300.

[0037] Similarly, each output processing unit o_n^m in output-minimize part 412 computes an output value o_n^m , where:

$$o_n^m = \underset{\text{for all } w_{nx}^m \neq 0}{\text{MIN}} \sum_{x=0}^{E_{num}-1} (w_{nx}^m r_x), \quad (8)$$

where the function "MIN" returns the minimum value of $(w_{nx}^m r_x)$ over all the elliptical processing units e_x . Therefore, each output processing unit o_n^m examines each of the elliptical processing units e_x to which it is connected and outputs a real value equal to the minimum output value from these elliptical processing units. Output-minimize part 412 of output level 406 is associated with means 308 of classification system 300.

[0038] Postprocessing level 408 includes two postprocessing units p^t and p^m . Postprocessing unit p^t is connected to and receives input from every output processing unit o_n^t of output-total part 410 of output level 406. Postprocessing unit p^t finds the output processing unit o_n^t that has the maximum output value and generates the value q^t . If output processing unit o_n^t of output-total part 410 has an output value greater than those of all the other output processing

units of output-total part 410, then the value q^i is set to n -- the index for that output processing unit. For example, when classifying capital letters n may be 0 for "A" and 1 for "B", etc. Otherwise, the value q^i is set to -1 to indicate that output-total part 410 of output level 406 did not classify the input. Postprocessing unit p^i of postprocessing level 408 is associated with means 312 of classification system 300.

[0039] Similarly, postprocessing unit p^m -- the other postprocessing unit in postprocessing level 408 -- is connected to and receives input from every output processing unit o_n^m of output-minimize part 412 of output level 406. Postprocessing unit p^m finds the output processing unit o_n^m that has the minimum output value and generates the value q^m . If output processing unit o_n^m of output-minimize part 412 has an output value less than a specified threshold θ^m , then the value q^m is set to the corresponding index n . Otherwise, the value q^m is set to -1 to indicate that output-minimize part 412 of output level 406 did not classify the input, because the feature vector F is outside the threshold region surrounding neuron x for all neurons x . The threshold θ^m may be the same threshold θ^m used in classification system 300 of Fig. 3. Postprocessing unit p^m of postprocessing level 408 is associated with means 316 of classification system 300.

[0040] Classification of the input is completed by analyzing the values q^i and q^m . If ($q^i \neq -1$), then the input is classified as possible output q^i of the set of s possible outputs. If ($q^i = -1$) and ($q^m \neq -1$), then the input is classified as possible output q^m of the set of s possible outputs. Otherwise, if both values are -1, then the input is not classified as any of the s possible outputs.

[0041] A neural network must be trained before it may be used to classify inputs. The training system performs this required training by generating at least one non-spherical neuron in the k -dimensional feature space. The training system is preferably implemented off line prior to the deployment of a classification system.

[0042] The training system of the present invention generates neurons based upon a set of training inputs, where each training input is known to correspond to one of the possible outputs in the classification set. Continuing with the example of capital letters used to describe classification system 300, each training input may be a bitmap corresponding to one of the characters from "A" to "Z". Each character must be represented by at least one training input, although typically 250 to 750 training inputs are used for each character.

[0043] Referring now to Fig. 5, there is shown a process flow diagram of training system 500 for generating neurons in k -dimensional feature space that may be used in classification system 300 of Fig. 3 or in classification system 400 of Fig. 4. For example, when training for output classification, training system 500 sequentially processes a set of training bitmap inputs corresponding to known outputs. At a particular point in the training, there will be a set of existing feature vectors that correspond to the training inputs previously processed and a set of existing neurons that have been generated from those existing feature vectors. For each training input, training system 500 generates a feature vector in a feature space that represents information contained in that training input.

[0044] Training system 500 applies two rules in processing each training input. The first training rule is that if the feature vector, corresponding to the training input currently being processed, is encompassed by any existing neurons that are associated with a different known output, then the boundaries of those existing neurons are spatially adjusted to exclude that feature vector -- that is, to ensure that that feature vector is not inside the boundary of those existing neurons. Otherwise, neurons are not spatially adjusted. For example, if the current training input corresponds to the character "R" and the feature vector corresponding to that training input is encompassed by two existing "P" neurons and one existing "B" neuron, then the boundaries of these three existing neurons are spatially adjusted to ensure they do not encompass the current feature vector.

[0045] The second training rule is that if the current feature vector is not encompassed by at least one existing neuron that is associated with the same known output, then a new neuron is created. Otherwise, no new neuron is created for the current feature vector. For example, if the current training input corresponds to the character "W" and the feature vector corresponding to that training input is not encompassed by any existing neuron that is associated with the character "W", then a new "W" neuron is created to encompass that current feature vector. In a preferred embodiment, a new neuron is created by generating a temporary hyper-spherical neuron and then spatially adjusting that temporary neuron to create the new neuron. In an alternative preferred embodiment, the temporary neuron may be a non-spherical hyper-ellipse.

[0046] In a preferred embodiment of the present invention, training system 500 generates hyper-elliptical neurons from a set of training bitmap inputs corresponding to known characters. Training system 500 starts with no existing feature vectors and no existing neurons. Processing of training system 500 begins with means 502 which selects as the current training input a first training input from a set of training inputs. Means 504 generates the feature vector F that corresponds to the current training input.

[0047] When the first training input is the current training input, there are no existing neurons and therefore no existing neurons that encompass feature vector F . In that case, processing of training system 500 flows to means 514 which creates a new neuron centered on feature vector F . The new neuron is preferably defined by Equation (3), where all the new neuron axes are set to the same length, that is, ($b_j = \lambda$) for all j . Since the new neuron axes are all the same length, the new neuron is a hyper-sphere in feature space of radius λ . In a preferred embodiment, the value of constant

λ may be twice as large as the largest feature element f_j of all the feature vectors F for the entire set of training inputs. Since there are no existing feature vectors when processing the first training input, training system 500 next flows to means 528 from which point the processing of training system 500 may be described more generally.

[0048] Means 528 determines whether the current training input is the last training input in the set of training inputs. If not, then means 528 directs processing of training system 500 to means 530 which selects the next training input as the current training input. Means 504 then generates the feature vector F corresponding to the current training input.

[0049] Means 506 and 508 determine which, if any, existing neurons are to be spatially adjusted to avoid encompassing feature vector F . In a preferred embodiment, means 510 adjusts an existing neuron if that neuron is not associated with the same known character as the current training input (as determined by means 506) and if it encompasses feature vector F (as determined by means 508). Means 508 determines if an existing neuron encompasses feature vector F by calculating and testing the "distance" measure r_x of Equation (4) and testing whether ($r_x < 1$) as described earlier.

[0050] In a preferred embodiment, means 510 spatially adjusts an existing neuron by optimally shrinking it along only one axis. In another preferred embodiment, means 510 shrinks an existing neuron proportionally along one or more axes. These shrinking methods are explained in greater detail later in this specification. After processing by means 510, the current feature vector is not encompassed by any existing neurons that are associated with a character which is different from the character associated with the training input. Hence, the current feature vector lies either outside or on the boundaries of such existing neurons.

[0051] Training system 500 also determines if a new neuron is to be created and, if so, creates that new neuron. A new neuron is created (by means 514) if the feature vector F is not encompassed by any existing neuron associated with the same character as the training input (as determined by means 512). As described above, means 514 creates a new neuron that is, preferably, a hyper-sphere of radius λ .

[0052] Training system 500 then tests and, if necessary, spatially adjusts each new neuron created by means 514 to ensure that it does not encompass any existing feature vectors that are associated with a character which is different from the character associated with the training input. Means 516, 524, and 526 control the sequence of testing a new neuron against each of the existing feature vectors by selecting one of the existing feature vectors at a time. If a new neuron is associated with a character different from that of the currently selected existing feature vector (as determined by means 518) and if the new neuron encompasses that selected existing feature vector (as determined by means 520 using Equation (4)), then means 524 spatially adjusts the new neuron by one of the same shrinking algorithms employed by means 510. Training system 500 continues to test and adjust a new neuron until all existing feature vectors have been processed. Since the hyper-spherical neuron created by means 514 is adjusted by means 522, that hyper-spherical neuron is a temporary neuron with temporary neuron axes of equal length. Processing of training system 500 then continues to means 528 to control the selection of the next training input.

[0053] In a preferred embodiment, the steps of (1) shrinking existing neurons for a given input, and (2) creating and shrinking a new neuron created for that same input may be performed in parallel. Those skilled in the art will understand that these two steps may also be performed sequentially in either order.

[0054] In a preferred embodiment, after all of the training inputs in the set of training inputs have been processed sequentially, means 528 directs processing of training system 500 to means 532. After processing a set of training inputs with their corresponding feature vectors, feature space is populated with both feature vectors and neurons. After processing the set of training inputs one time, some feature vectors may not be encompassed by any neurons. This occurs when feature vectors, that were, at some point in the training process, encompassed by neuron(s) of the same character, become excluded from those neurons when those neurons were shrunk to avoid subsequent feature vectors associated with a different character. In such a situation, means 532 directs processing to return to means 502 to repeat processing of the entire set of training inputs. When repeating this processing, the previously created neurons are retained. By iteratively repeating this training process, new neurons are created with each iteration until eventually each and every feature vector is encompassed by one or more neurons that are associated with the proper output and no feature vectors are encompassed by neurons associated with different possible outputs. Moreover, this iterative training is guaranteed to converge in a finite period of time with the maximum number of iterations being equal to the total number of training inputs.

[0055] After training system 500 completes its processing, the feature space is populated with neurons that may then be used by characterization system 300 or characterization system 400 to classify an unknown input into one of a plurality of possible outputs.

[0056] As mentioned earlier, in a preferred embodiment, training system 500 spatially adjusts the boundary of a hyper-elliptical neuron to exclude a particular feature vector by optimally shrinking along one axis. Means 510 and 522 of training system 500 may perform this one-axis shrinking by (1) identifying the axis to shrink, and (2) calculating the new length for that axis.

[0057] Training system 500 identifies the axis n to shrink by the formula:

$$n = \underset{0 \leq i \leq k-1}{\operatorname{argmax}} \left[\frac{\left(\prod_{\substack{j=0 \\ j \neq i}}^{k-1} b_j \right) \cdot |f_i - c_i|}{\sqrt{1 - \sum_{\substack{j=0 \\ j \neq i}}^{k-1} \frac{(f_j - c_j)^2}{b_j^2}}} \right] \quad (9)$$

where the function "argmax" returns the value of i that maximizes the expression in the square brackets for any i from 0 to $k-1$; c_j and b_j define the center point and axis lengths, respectively, of the neuron to be adjusted; and f_j define the feature vector to be excluded by that neuron.

[0058] Training system 500 then calculates the new length b'_n for axis n by the equation:

$$b'_n = \frac{|f_n - c_n|}{\sqrt{1 - \sum_{\substack{j=0 \\ j \neq n}}^{k-1} \frac{(f_j - c_j)^2}{b_j^2}}} \quad (10)$$

In one-axis shrinking, all other axes retain their original lengths b_j .

[0059] One-axis shrinking of an original hyper-elliptical neuron according to Equations (9) and (10) results in an adjusted neuron with the greatest hyper-volume V that satisfies the following four criteria:

- (1) The adjusted neuron is a hyper-ellipse;
- (2) The center point of the original neuron is the same as the center point of the adjusted neuron;
- (3) The feature vector to be excluded lies on the boundary of the adjusted neuron; and
- (4) All points within or on the boundary of the adjusted neuron lie within or on the boundary of the original neuron.

The hyper-volume V is defined by:

$$V = C_k \prod_{j=c}^{k-1} b_j \quad (11)$$

where C_k is a constant that depends on the value of k , where k is the dimension of the feature space, and b_j are the lengths of the axes defining the adjusted neuron. One-axis shrinking, therefore, provides a first method for optimally adjusting neurons.

[0060] In alternative preferred embodiment, training system 500 spatially adjusts the boundary of a hyper-elliptical neuron to exclude a particular feature vector by shrinking proportionally along one or more axes. Means 510 and 522 of training system 500 may perform proportional shrinking by calculating the vector ΔB of axis length changes Δb_j , where:

$$\Delta B = -\alpha \left[\frac{|F-C|^T}{|F-C|} \right] \cdot (B^T B - [F-C]^T [F-C]) - \Gamma, \quad (12)$$

where:

$$\Delta B = (\Delta b_0, \Delta b_1, \dots, \Delta b_{k-1}), \quad (13)$$

$$\frac{|F-C|^T}{\|F-C\|} = \text{Vector of Cosines}, \quad (14)$$

$$|F-C|^T = (|f_0-c_0|, |f_1-c_1|, \dots, |f_{k-1}-c_{k-1}|), \quad (15)$$

$$F = (f_0, f_1, \dots, f_{k-1})^T, \quad (16)$$

$$C = (c_0, c_1, \dots, c_{k-1})^T, \quad (17)$$

$$B = \begin{bmatrix} b_0 & 0 & 0 & \dots & 0 \\ 0 & b_1 & 0 & \dots & 0 \\ 0 & 0 & b_2 & \dots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \dots & b_{k-1} \end{bmatrix}, \quad (18)$$

$$F = \begin{bmatrix} f_0 & 0 & 0 & \dots & 0 \\ 0 & f_1 & 0 & \dots & 0 \\ 0 & 0 & f_2 & \dots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \dots & f_{k-1} \end{bmatrix}, \quad (19)$$

$$C = \begin{bmatrix} c_0 & 0 & 0 & \dots & 0 \\ 0 & c_1 & 0 & \dots & 0 \\ 0 & 0 & c_2 & \dots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \dots & c_{k-1} \end{bmatrix}, \quad (20)$$

and

$$r = (\gamma_0, \gamma_1, \dots, \gamma_{k-1}), \quad (21)$$

where $|f_0-c_0|$ is the absolute value of (f_0-c_0) ; $\|F-C\|$ is the magnitude of the vector difference between F and C ; c_i and b_j define the center point and axis lengths, respectively, of the neuron to be adjusted; f_i are the elements of the feature vector to be excluded from that neuron; and α and γ_i may be constants. The new axis lengths b_j for the adjusted neuron are calculated by:

$$b_j = b_j + \Delta b_j \quad (22)$$

for j from 0 to $k-1$.

[0061] In proportional shrinking, training system **500** determines the projections of a vector onto the axes of the neuron to be adjusted, where the vector points from the center of that neuron to the feature vector to be excluded. These projections are represented by the vector of cosines of Equation (14). Training system **500** then determines how much to shrink each neuron axis based on the relationship between the length of the axis and the length of the projection onto that axis.

[0062] In a preferred embodiment, the constant α in Equation (12) is selected to be less than 1. In this case, training system **500** may perform iterative shrinking, where the neuron is slowly adjusted over multiple axis-shrinking steps until it is determined that the feature vector to be excluded is outside the adjusted neuron. In a preferred embodiment, parameter γ_j may be set to a positive value that is roughly 0.001 times the size of axis j to ensure that proportional shrinking eventually places the feature vector outside the neuron. In an alternative preferred embodiment, the parameters γ_j may be error functions based on the distance from the feature vector to the boundary of the slowly adjusted neuron. In such case, training system **500** may operate as a proportional integral controller for adjusting neurons.

[0063] In a preferred embodiment, the set of training inputs, used sequentially by the training system to generate neurons, may be organized according to input quality. The training inputs may be ordered to train with higher quality inputs before proceeding to those of lower quality. This quality ordering of training inputs ensures that neurons are centered about feature vectors that correspond to inputs of higher quality. Such ordered training may improve the performance efficiency of a classification system by reducing the numbers of neurons needed to define the classification system. Such ordering may also reduce the numbers of misclassifications and non-classifications made by the classification system. A misclassification is when a classification system selects one possible output when, in truth, the input corresponds to a different possible output. A non-classification is when a classification system fails to select one of the known outputs and instead outputs a no-output-selected result.

[0064] Referring now to Figs. 1(a), 1(b), 1(c), and 1(d), there are shown bitmap representations of a nominal letter "O", a degraded letter "O", a nominal number "7", and a degraded letter "7", respectively. A nominal input is an ideal input with no noise associated with it. A degraded input is one in which noise has created deviations from the nominal input. Degraded inputs may result from either controlled noise or real unpredictable noise.

[0065] In a preferred embodiment, the training system of the present invention may train with training inputs of three different quality levels. The first level of training inputs are nominal inputs like those presented in Figs. 1(a) and 1(c). The second level of training inputs are controlled noise inputs, a type of degraded input created by applying defined noise functions or signals with different characteristics, either independently or in combination, to nominal inputs. The third level of training inputs are real noise inputs, a second type of degraded inputs which, in the case of characters, may be optically acquired images of known characters. Such degraded inputs have real unpredictable noise. Figs. 1(b) and 1(d) present representations of possible controlled noise inputs and real noise inputs. In a preferred embodiment, the nominal inputs have the highest quality, with the controlled noise inputs and real noise inputs of decreasing lesser quality. Depending upon the controlled noise functions and signals applied, a particular controlled-noise input may be of greater or lesser quality than a particular real-noise input.

[0066] The quality of a particular degraded input -- of either controlled-noise or real-noise variety -- may be determined by comparing the degraded input to a nominal input corresponding to the same known character. In a preferred embodiment, a quality measure may be based on the number of pixels that differ between the two inputs. In another preferred embodiment, the quality measure may be based on conventional feature measures such as Grid or Hadamard features.

[0067] In a preferred embodiment, training systems train first with the nominal inputs and then later with degraded controlled-noise and real-noise inputs. In this preferred embodiment, training with inputs corresponding to Figs. 1(a) and 1(c) would proceed training with those of Figs. 1(b) and 1(d). In another preferred embodiment, the training system trains with all inputs of the same known character prior to proceeding to the next known character, and the training inputs of each known character are internally organized by quality. In this preferred embodiment, training with Fig. 1(a) proceeds that with Fig. 1(b), and training with Fig. 1(c) proceeds that with Fig. 1(d). Those skilled in the art will understand that the exact overall sequence of training with all of the inputs is of lesser importance than ordering of inputs by quality for each different known character.

[0068] After the training system has completed training, the feature space is populated with neurons that encompass feature vectors, with one feature vector corresponding to each distinct training input. Each neuron may encompass one or more feature vectors -- the one at the center of the neuron that was used to create the neuron and possibly other feature vectors corresponding to inputs associated with the same known character.

[0069] Depending upon the quality ordering of the training inputs used in the sequential training, a particular neuron

may encompass those feature vectors in a more or less efficient manner. For example, if the feature vector used to create a particular neuron corresponds to a highly degraded input, then that feature vector will lie at the center of that neuron. That same neuron may also encompass other feature vectors corresponding to nominal inputs and inputs of lesser degradation. Such a neuron may not be the most efficient neuron for encompassing that set of feature vectors.

5 A classification system using such a neuron may make more misclassifications and non-classifications than one using a more efficient neuron.

[0070] A refinement system spatially adjusts neurons, created during training, to create more efficient neurons. This refinement system may characterize the spatial distribution of feature vectors encompassed by a particular neuron and then spatially adjust that neuron. Such spatial adjustment may involve translating the neuron from its current center point toward the mean of the spatial distribution of those feature vectors. After translating the neuron, the axis lengths may be adjusted to ensure that feature vectors of the same output character are encompassed by the neuron and to ensure that feature vectors of different output character are excluded.

[0071] In an alternative embodiment, the refinement system may spatially adjust two or more neurons of the same character to create one or more neurons that more efficiently encompass the same feature vectors, where a feature vector from one original neuron may be encompassed by a different more efficient neuron. For example, before refinement, a first neuron may encompass feature vectors F_1 , F_2 , and F_3 , and a second neuron may encompass feature vectors F_4 , F_5 , F_6 , and F_7 . After refinement, feature vectors F_1 , F_2 , F_3 , and F_4 may be encompassed by a third neuron, and feature vectors F_5 , F_6 , and F_7 may be encompassed by a fourth neuron, where the centers and axis lengths of the third and fourth neurons are all different from those of the first and second neurons.

[0072] In a preferred embodiment, a classification system classifies inputs into one of a set of possible outputs by comparing the feature vector, for each input to be classified, with every neuron in the feature space. Such classification systems are presented in Figs. 3 and 4.

[0073] Referring now to Fig. 6, there is shown classification system 600 -- a second preferred embodiment -- in which inputs are classified into one of a set of possible outputs using neurons and cluster classifiers. Classification system 600 includes top-level classifier 602 and two or more cluster classifiers 604, 606, ..., 608. Top-level classifier 602 classifies inputs into appropriate clusters of inputs. For example, where classification system 600 classifies characters, top-level classifiers 602 may classify input bitmaps corresponding to optically acquired characters into clusters of characters.

[0074] The characters clustered together may be those represented by similar bitmaps, or, in other words, those characters associated with feature vectors close to one another in feature space. For example, a first character cluster may correspond to the characters "D", "P", "R" and "B". A second character cluster may correspond to the characters "O", "C", "D", "U", and "Q". A third cluster may correspond to only one character such as the character "Z". A particular character may be in more than one character cluster. In this example, the character "D" is in both the first and the second character clusters, because its bitmaps are similar to those of both clusters.

[0075] In a preferred embodiment, before training, characters are clustered based on a confusion matrix. The confusion matrix represents the likelihood that one character will be confused with another character for every possible pair of characters. In general, the closer the feature vectors of one character are to those of another character, the higher the likelihood that those two characters may be confused. For example, the character "D" may have a higher confusion likelihood with respect to the "O" than to the "M", if the feature vectors for "D" are closer to the feature vectors for "O" than to those for "M".

[0076] In a preferred embodiment, the clustering of characters is based upon a conventional K-Means Clustering Algorithm, in which a set of templates is specified for each character, where each template is a point in feature space. The K-Means Clustering Algorithm determines where in feature space to locate the templates for a particular character by analyzing the locations of the feature vectors for all of the training inputs corresponding to that character. Templates are preferably positioned near the arithmetic means of clusters of associated feature vectors.

[0077] In a preferred embodiment, four templates may be used for each character and the number of characters per cluster may be roughly even. For example, when classifying the 64 characters corresponding to the 26 capital and 26 lower-case letters, the 10 digits, and the symbols "&" and "#", 4x64 or 256 templates may be used to define 7 different clusters of roughly equivalent numbers of characters.

[0078] By clustering characters, top-level classifier 602 may implement a classification algorithm that quickly and accurately determines the appropriate cluster for each input. In a preferred embodiment, top-level classifier 602 implements a neuron-based classification algorithm. In another preferred embodiment, other conventional non-neural classification algorithms may be performed by top-level classifier 602. Top-level classifier 602 selects the appropriate cluster for a particular input and directs processing to continue to the appropriate cluster classifier 604, 606, ..., 608. Each cluster classifier is associated with one and only one character cluster, and vice versa.

[0079] In one preferred embodiment, each cluster classifier may implement a classification algorithm unique to that character cluster, or shared by only a subset of the total number of character clusters. Each cluster classifier may therefore employ neurons that exist in a feature space unique to that character cluster. For example, training for the

"P", "R", "B" cluster may employ a particular set of Grid features, while training for the "O", "C", "D", "U", "Q" cluster may employ a different set of Hadamard features. In that case, different training procedures are performed for each different cluster classifier, where only inputs corresponding to those characters of the associated cluster are used for each different training procedure.

[0080] In a third preferred embodiment, a classification system according to Fig. 6 may classify inputs into one of a set of possible outputs using neurons and cluster classifiers. In this third embodiment, top-level classifier 602 identifies the template in feature space closest to the feature vector for the current input to be classified. The identified template is associated with a particular character that belongs to one or more character clusters. The top-level classifier 602 directs processing to only those cluster classifiers 604, 606, ..., 608 associated with the character clusters of the closest template. Since a particular character may be in more than one character cluster, more than one cluster classifier may be selected by top-level classifier 602 for processing.

[0081] In a fourth preferred embodiment, each cluster classifier may have a decision tree that identifies those neurons that should be processed for a given input. Prior to classifying, feature vector space for a particular cluster classifier may be divided into regions according to the distribution of feature vectors and/or neurons in feature space. Each region contains one or more neurons, each neuron may belong to more than one region, and two or more regions may overlap. Top-level classifier 602 may determine in which feature-space region (or regions) the feature vector for the current input lies and may direct the selected cluster classifiers to process only those neurons associated with the region (or those regions).

[0082] Those skilled in the art will understand that some classification systems may use decision trees without cluster classifiers, some may use cluster classifiers without decision trees, some may use both, and others may use neither. Those skilled in the art will further understand that decision trees and cluster classifiers may increase the efficiency of classification systems by reducing processing time.

[0083] Those skilled in the art will understand that classifying systems may be arranged in series or parallel. For example, in a preferred embodiment, a first character classifier based on Grid features may be arranged in series with a second character classifier based on Hadamard features. In such case, the first classifier classifies a particular bitmap input as one of the known characters or it fails to classify that input. If it fails to classify, then the second classifier attempts to classify that input.

[0084] In an alternative embodiment, two or more different classifiers may be arranged in parallel. In such case, a voting scheme may be employed to select the appropriate output by comparing the outputs of each different classifier.

[0085] In a preferred embodiment, classification systems and training systems perform parallel processing, where each elliptical processing unit may run on a separate computer processor during classification, although those skilled in the art will understand that these systems may also perform serial processing. In a preferred embodiment, the classification systems and training systems may reside in a reduced instruction set computer (RISC) processor such as a SPARC 2 processor running on a SPARC-station 2 marketed by Sun Microsystems.

[0086] Those skilled in the art will understand that inputs other than character images may be classified with the classification systems. In general, any input may be classified as being one of a set of two or more possible outputs, where a no-selection result is one of the possible outputs. For example, the classification systems may be used to identify persons based upon images of their faces, fingerprints, or even earlobes. Other classification systems of the present invention may be used to identify people from recordings of their voices.

Claims

1. A classification method for classifying an input into one of a plurality of possible outputs, comprising the steps of:

- (a) comparing information representative of said input to a neuron, wherein said neuron comprises a boundary defined by two or more neuron axes of different length; and
- (b) selecting one of said possible outputs as corresponding to said input in accordance with the comparison of step (a), wherein

step (a) comprises the step of comparing information representative of said input to a plurality of neurons, wherein each neuron of said plurality of neurons comprises a boundary defined by two or more neuron axes of different length,

characterised in that

said information representative of said input comprises a feature vector, wherein step (a) further comprises the step of selecting each neuron that encompasses said feature vector, by determining distance measures from said feature vector to each of said neurons, and wherein step (b) comprises the steps of:

- (i) selecting a neuron of said plurality of neurons having the smallest distance measure of said distance measures; and
- (ii) selecting a possible output of said plurality of possible outputs that is associated with said selected neuron as corresponding to said input,

and wherein step (b) further comprises the steps of:

- (i) determining a first number that is a function of the number of said selected neurons that are associated with a first possible output of said plurality of possible outputs;
- (ii) determining a second number that is a function of the number of said selected neurons that are associated with a second possible output of said plurality of possible outputs; and
- (iii) if said first number is greater than said second number then determining that said input does not correspond to said second possible output, else if said second number is greater than said first number then determining that said input does not correspond to said first possible output.

2. The classification method of claim 1, wherein said neuron is in a feature space comprising two or more feature-space axes, wherein at least one of said neuron axes is parallel to one of said feature-space axes.

3. The classification method of claim 1, wherein said neuron is in a feature space comprising two or more feature-space axes, wherein at least one of said neuron axes is parallel to none of said feature-space axes.

4. The classification method of claim 1, wherein said first number is equal to the number of said selected neurons that are associated with said first possible output, and said second number that is equal to the number of said selected neurons that are associated with said second possible output.

5. The method of claim 1, wherein said feature vector comprises a feature element, wherein said feature element is a Grid feature element or a Hadamard feature element.

6. The method of claim 1, wherein said neuron is a hyper-ellipse or a hyper-rectangle in k-dimensional feature space, where k is greater than or equal to two.

7. A classification apparatus for classifying an input into one of a plurality of possible outputs, comprising:

- comparing means for comparing information representative of said input to a neuron, wherein said neuron comprises a boundary defined by two or more neuron axes of different length; and
- selecting means for selecting one of said possible outputs as corresponding to said input in accordance with the comparison by said comparing means,

wherein said comparing means compares information representative of said input to a plurality of neurons, wherein each neuron of said plurality of neurons comprises a boundary defined by two or more neuron axes of different length,

characterised in that said information representative of said input comprises a feature vector, said comparing means selects each neuron that encompasses said feature vector, said comparing means determines distance measures from said feature vector to each of said neurons, said selecting means selects a neuron of said plurality of neurons having the smallest distance measure of said distance measures, and said selecting means selects a possible output of said plurality of possible outputs that is associated with said selected neuron as corresponding to said input,

said selecting means determines a first number that is a function of the number of said selected neurons that are associated with a first possible output of said plurality of possible outputs, said selecting means determines a second number that is a function of the number of said selected neurons that are associated with a second possible output of said plurality of possible outputs, and if said first number is greater than said second number, then said selecting means determines that said input does not correspond to said second possible output, else if said second number is greater than said first number, then said selecting means determines that said input does not correspond to said first possible output.

8. The classification apparatus of claim 7, wherein said neuron is in a feature space comprising two or more feature-space axes, wherein at least one of said neuron axes is parallel to one of said feature-space axes.

9. The classification apparatus of claim 7, wherein said neuron is in a feature space comprising two or more feature-space axes, wherein at least one of said neuron axes is parallel to none of said feature-space axes.
10. The classification apparatus of claim 7, wherein said first number is equal to the number of said selected neurons that are associated with said first possible output, and said second number that is equal to the number of said selected neurons that are associated with said second possible output.
11. The apparatus of claim 7, wherein said feature vector comprises a feature element, wherein said feature element is a Grid feature element or a Hadamard feature element.
12. The apparatus of one of the claims 7, wherein said neuron is a hyper-ellipse or a hyper-rectangle in k-dimensional feature space, where k is greater than or equal to two.

Patentansprüche

1. Klassifikationsverfahren zum Klassifizieren einer Eingabe hin zu einer von mehreren möglichen Ausgaben, mit den Schritten:
 - (a) Vergleichen von die Eingabe darstellender Information mit einem Neuron, das eine durch zwei oder mehr unterschiedlich lange Neuronachsen definierte Grenze aufweist; und
 - (b) Wählen einer der möglichen Ausgaben als dem Eingang entsprechend nach Maßgabe des Vergleichs im Schritt (a), wobei

Schritt (a) den Schritt des Vergleichens von die Eingabe darstellender Information mit mehreren Neuronen aufweist, wobei jedes der Neuronen eine durch unterschiedlich lange Neuronachsen definierte Grenze aufweist, **dadurch gekennzeichnet, daß** die die Eingabe darstellende Information einen Merkmalsvektor aufweist und wobei Schritt (a) den Schritt des Auswählens jedes Neurons aufweist, das den Merkmalsvektor einschließt, indem ein Abstandsmaß vom Merkmalsvektor zu jedem der Neuronen bestimmt wird, und wobei Schritt (b) folgende Schritte aufweist:

 - (i) Auswählen desjenigen der Neuronen, das unter den Abstandsmaßen das kleinste Abstandsmaß hat; und
 - (ii) Wählen derjenigen der möglichen Ausgaben, die mit dem ausgewählten Neuron assoziiert ist, als der Eingabe entsprechend,

und wobei Schritt (b) weiterhin folgende Schritte aufweist:

 - (i) Bestimmen einer ersten Zahl, die eine Funktion der Anzahl der ausgewählten Neuronen ist, die mit einer ersten möglichen Ausgabe der mehreren möglichen Ausgaben assoziiert sind;
 - (ii) Bestimmen einer zweiten Zahl, die eine Funktion der Anzahl der ausgewählten Neuronen ist, die mit einer zweiten möglichen Ausgabe der mehreren möglichen Ausgaben assoziiert sind; und
 - (iii) wenn die erste Zahl größer ist als die zweite Zahl Bestimmen, daß die Eingabe nicht der zweiten möglichen Ausgabe entspricht, und wenn die zweite Zahl größer ist als die erste Zahl Bestimmen, daß die Eingabe nicht der ersten möglichen Ausgabe entspricht.
2. Klassifikationsverfahren nach Anspruch 1, bei dem das Neuron in einem Merkmalsraum mit zwei oder mehr Merkmalsraumachsen liegt, wobei zumindest eine der Neuronachsen parallel zu einer der Merkmalsraumachsen ist.
3. Klassifikationsverfahren nach Anspruch 1, bei dem das Neuron in einem Merkmalsraum liegt mit zwei oder mehr Merkmalsraumachsen, wobei zumindest eine der Neuronachsen parallel zu keiner der Merkmalsraumachsen ist.
4. Klassifikationsverfahren nach Anspruch 1, bei dem die erste Zahl gleich der Zahl der ausgewählten Neuronen ist, die mit einer ersten möglichen Ausgabe assoziiert sind, und die zweite Zahl gleich der Anzahl der ausgewählten Neuronen ist, die der zweiten möglichen Ausgabe assoziiert sind.
5. Verfahren nach Anspruch 1, bei dem der Merkmalsvektor ein Merkmalselement aufweist, wobei das Merkmalselement ein Grid-Merkmalselement oder ein Hadamard-Merkmalselement ist.

6. Verfahren nach Anspruch 1, bei dem das Neuron eine Hyperellipse oder ein Hyperrechteck in einem k-dimensionalen Merkmalsraum ist, wobei k größer gleich zwei ist.
7. Klassifikationsvorrichtung zum Klassifizieren einer Eingabe hin zu einer von mehreren möglichen Ausgaben, mit einer Vergleichseinrichtung zum Vergleichen von die Eingabe darstellender Information mit einem Neuron, wobei das Neuron eine durch zwei oder mehr unterschiedlich lange Neuronachsen definierte Grenze aufweist; und einer Auswahleinrichtung zum Wählen einer der möglichen Ausgaben als der Eingabe entsprechend nach Maßgabe des Vergleichs durch die Vergleichseinrichtung, wobei die Vergleichseinrichtung Information, die die Eingabe darstellt, mit mehreren Neuronen vergleicht, wobei jedes der Neuronen eine durch zwei oder mehr unterschiedlich lange Neuronachsen definierte Grenze aufweist, **dadurch gekennzeichnet, daß** die die Eingabe darstellende Information einen Merkmalsvektor aufweist, die Vergleichseinrichtung jedes Neuron auswählt, das den Merkmalsvektor einschließt, wobei die Vergleichseinrichtung ein Abstandsmaß vom Merkmalsvektor zu jedem der Neuronen bestimmt und die Auswahleinrichtung dasjenige der Neuronen wählt, das das kleinste Abstandsmaß der Abstandsmaße hat, und wobei die Auswahleinrichtung diejenige der möglichen Ausgaben als der Eingabe entsprechend wählt, die mit dem ausgewählten Neuron assoziiert ist, wobei die Auswahleinrichtung eine erste Zahl bestimmt, die eine Funktion der Zahl der ausgewählten Neuronen ist, die mit einer ersten möglichen Ausgabe der möglichen Ausgaben assoziiert sind, wobei die Auswahleinrichtung eine zweite Zahl bestimmt, die eine Funktion der Zahl der ausgewählten Neuronen ist, die mit einer zweiten möglichen Ausgabe der möglichen Ausgaben assoziiert sind, wobei dann, wenn die erste Zahl größer ist als die zweite Zahl, die Auswahleinrichtung bestimmt, daß die Eingabe nicht der zweiten möglichen Ausgabe entspricht, und dann, wenn die zweite Zahl größer als die erste Zahl ist, die Auswahleinrichtung bestimmt, daß die Eingabe nicht der ersten möglichen Ausgabe entspricht.
8. Klassifikationsvorrichtung nach Anspruch 7, bei der das Neuron in einem Merkmalsraum mit zwei oder mehr Merkmalsraumachsen liegt, wobei zumindest eine der Neuronachsen parallel zu einer der Merkmalsraumachsen ist.
9. Klassifikationsvorrichtung nach Anspruch 7, bei der das Neuron in einem Merkmalsraum mit zwei oder mehr Merkmalsraumachsen liegt, wobei zumindest eine der Neuronachsen parallel zu keiner der Merkmalsraumachsen ist.
10. Klassifikationsvorrichtung nach Anspruch 7, bei der die erste Anzahl gleich der Anzahl der ausgewählten Neuronen ist, die mit der ersten möglichen Ausgabe assoziiert sind, und wobei die zweite Zahl gleich der Anzahl der ausgewählten Neuronen ist, die der zweiten möglichen Ausgabe assoziiert sind.
11. Vorrichtung nach Anspruch 7, wobei der Merkmalsvektor ein Merkmalselement aufweist, wobei das Merkmalselement ein Grid-Merkmalselement oder ein Hadamard-Merkmalselement ist.
12. Vorrichtung nach Anspruch 7, bei der das Neuron eine Hyperellipse oder ein Hyperrechteck in einem k-dimensionalen Merkmalsraum ist, wobei k größer gleich zwei ist.

Revendications

1. Méthode de classification pour classifier une entrée dans une sortie parmi une pluralité de sorties possibles, comprenant les étapes suivantes :

a) comparer l'information représentative de ladite entrée à un neurone, où ledit neurone comprend une limite définie par deux axes de neurones ou plus de différentes longueurs ;

et

b) sélectionner une desdites sorties possibles comme correspondant à ladite entrée selon la comparaison de l'étape (a),

où

l'étape (a) comprend l'étape consistant à comparer l'information représentative de ladite entrée à une pluralité de neurones, où chaque neurone de ladite pluralité de neurones comprend une limite définie par deux axes de neurones ou plus de différentes longueurs,

caractérisée en ce que

ladite information représentative de ladite entrée comprend un vecteur à fonctions, où l'étape (a) comprend en outre l'étape de sélection de chaque neurone qui englobe ledit vecteur à fonctions en déterminant les mesures de

distance dudit vecteur à fonctions à chacun desdits neurones et où l'étape (b) comprend les étapes suivantes :

i. sélectionner un neurone de ladite pluralité de neurones ayant la plus petite mesure de distance desdites mesures de distance ; et

ii. sélectionner une sortie possible de ladite pluralité de sorties possibles qui est associée avec ledit neurone sélectionné comme correspondant à ladite entrée,

et où l'étape (b) comprend en outre les étapes suivantes :

i. déterminer un premier nombre qui est une fonction du nombre desdits neurones sélectionnés qui sont associés à une première sortie possible de ladite pluralité de sorties possibles ;

ii. déterminer un deuxième nombre qui est une fonction du nombre desdits neurones sélectionnés qui sont associés à une deuxième sortie possible de ladite pluralité des sorties possibles ; et

iii. si ledit premier nombre est plus grand que ledit deuxième nombre, alors déterminer que ladite entrée ne correspond pas à ladite deuxième sortie possible, ou bien si ledit deuxième nombre est supérieur au dit premier nombre, alors déterminer que ladite entrée ne correspond pas à ladite première sortie possible.

2. Méthode de classification selon la revendication 1, où ledit neurone est dans un espace des fonctions comprenant deux axes de l'espace des fonctions ou plus ; où au moins un desdits axes de neurone est parallèle à l'un desdits axes de l'espace des fonctions.

3. Méthode de classification selon la revendication 1, où ledit neurone est dans un espace des fonctions comprenant deux axes de l'espace des fonctions ou plus, où au moins un desdits axes de neurone est parallèle à aucun desdits axes de l'espace des fonctions.

4. Méthode de classification selon la revendication 1, où ledit premier nombre est égal au nombre desdits neurones sélectionnés qui sont associés à ladite première sortie possible, et ledit deuxième nombre est égal au nombre desdits neurones sélectionnés qui sont associés à ladite deuxième sortie possible.

5. Méthode selon la revendication 1, où ledit vecteur à fonctions comprend un élément, où ledit élément est un élément de Grid ou un élément de Hadamard.

6. Méthode selon la revendication 1, où ledit neurone est une hyper-ellipse ou un hyper-rectangle dans l'espace des fonctions k- dimensionnels, où k est supérieur ou égal à deux.

7. Appareil de classification pour classier une entrée dans une sortie parmi une pluralité de sorties possibles, comprenant :

Un moyen de comparaison pour comparer l'information représentative de ladite entrée à un neurone, où ledit neurone comprend une limite définie par deux axes de neurones ou plus de différentes longueurs, et

un moyen de sélection pour sélectionner une desdites sorties possibles comme correspondant à ladite entrée selon la comparaison faite avec ledit moyen de comparaison,

où ledit moyen de comparaison compare une information représentative de ladite entrée à une pluralité de neurones, où chaque neurone de ladite pluralité de neurones comprend une limite définie par deux axes de neurones ou plus de différentes longueurs, **caractérisé en ce que**

ladite information représentative de ladite entrée renferme un vecteur à fonctions, ledit moyen de comparaison sélectionne chaque neurone qui englobe ledit vecteur à fonctions, ledit moyen de comparaison détermine les mesures de distance allant dudit vecteur à fonctions à chacun desdits neurones, ledit moyen de sélection sélectionne un neurone parmi ladite pluralité de neurones ayant la plus petite mesure de distance parmi lesdites mesures de distance et ledit moyen de sélection sélectionne une sortie possible parmi ladite pluralité de sorties possibles qui est associée au dit neurone sélectionné comme correspondant à ladite entrée, ledit moyen de sélection détermine un premier nombre qui est une fonction du nombre desdits neurones sélectionnés qui sont associés à une première sortie possible parmi ladite pluralité de sorties possibles, ledit moyen de sélection détermine un

deuxième nombre qui est une fonction du nombre desdits neurones sélectionnés qui sont associés à une deuxième sortie possible parmi ladite pluralité de sorties possibles, et si ledit premier nombre est supérieur au dit deuxième nombre, alors ledit moyen de sélection détermine que ladite entrée ne correspond pas à ladite deuxième sortie possible, ou bien si ledit deuxième nombre est supérieur au dit premier nombre, alors ledit moyen de sélection détermine que ladite entrée ne correspond pas à ladite première sortie possible.

8. Dispositif de classification selon la revendication 7, où ledit neurone est dans un espace des fonctions comprenant deux axes ou plus de l'espace des fonctions, où au moins un desdits axes de neurone est parallèle à l'un desdits axes de l'espace des fonctions.

9. Dispositif de classification selon la revendication 7, où ledit neurone est dans un espace des fonctions comprenant deux axes ou plus de l'espace des fonctions, où au moins un desdits axes de neurone est parallèle à aucun desdits axes de l'espace des fonctions.

10. Dispositif de classification selon la revendication 7, où ledit premier nombre est égal au nombre desdits neurones sélectionnés qui sont associés à ladite première sortie possible, et ledit deuxième nombre est égal au nombre desdits neurones sélectionnés qui sont associés à ladite deuxième sortie possible.

11. Dispositif selon la revendication 7, où ledit vecteur à fonctions comprend un élément, où ledit élément est un élément de Grid ou un élément de Hadamard.

12. Dispositif selon la revendication 7, où ledit neurone est une hyper-ellipse ou un hyper-rectangle dans l'espace des fonctions k- dimensionnels, où k est supérieur ou égal à deux.

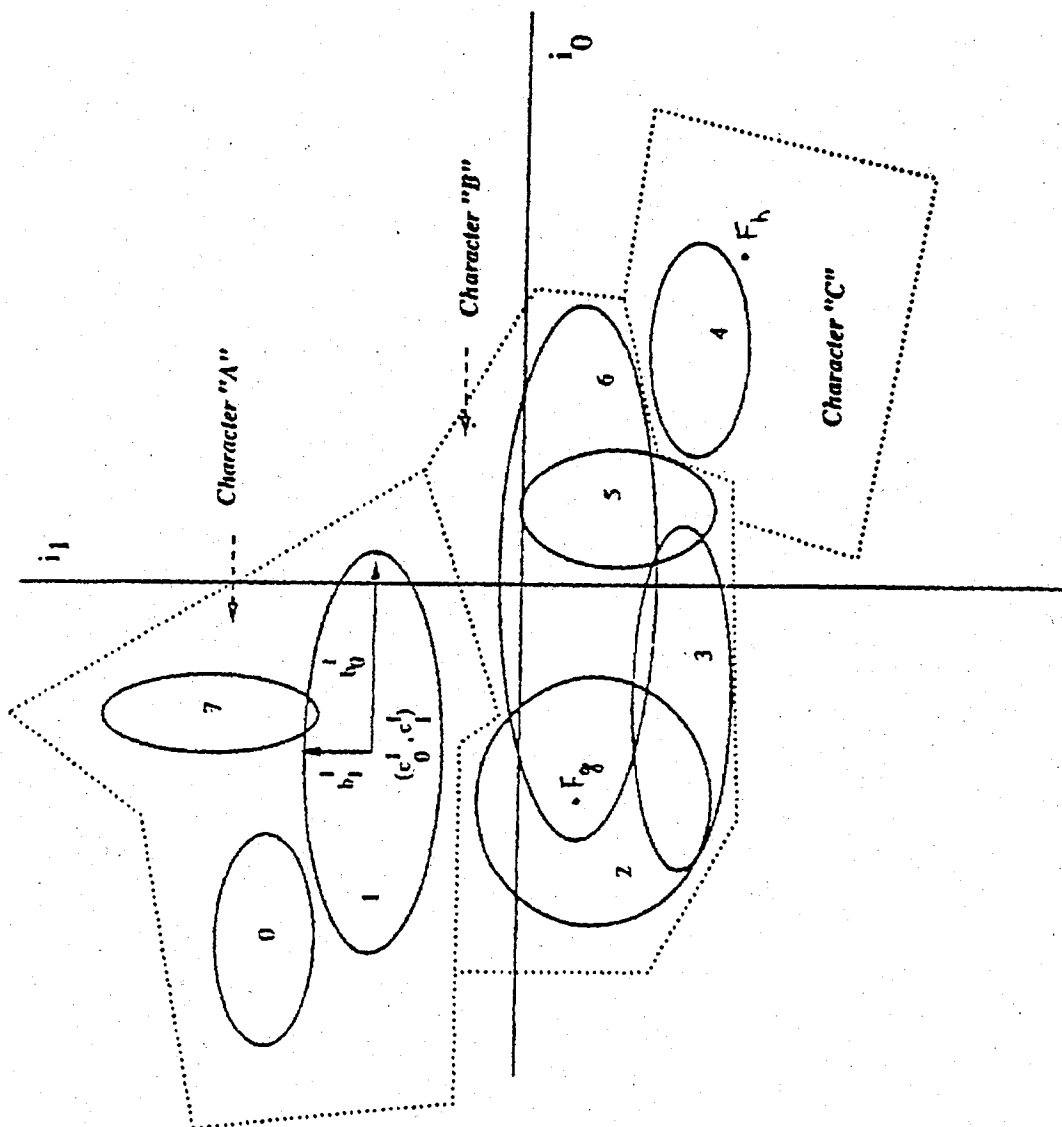
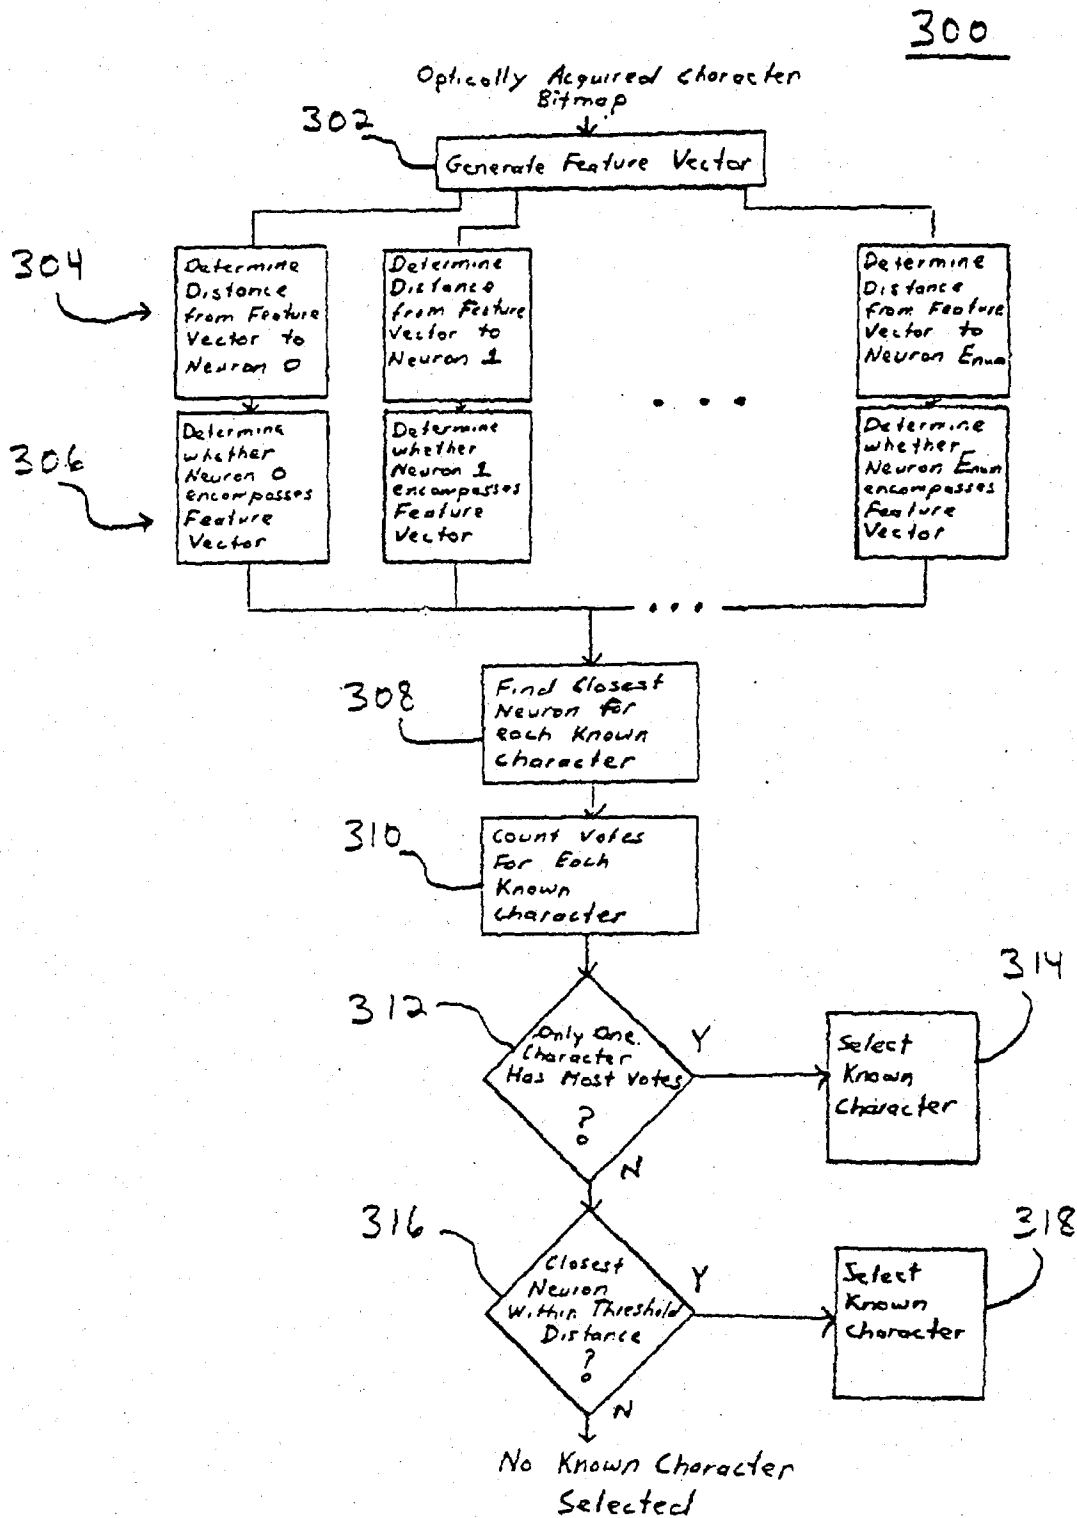


Fig. 2

Figure 3



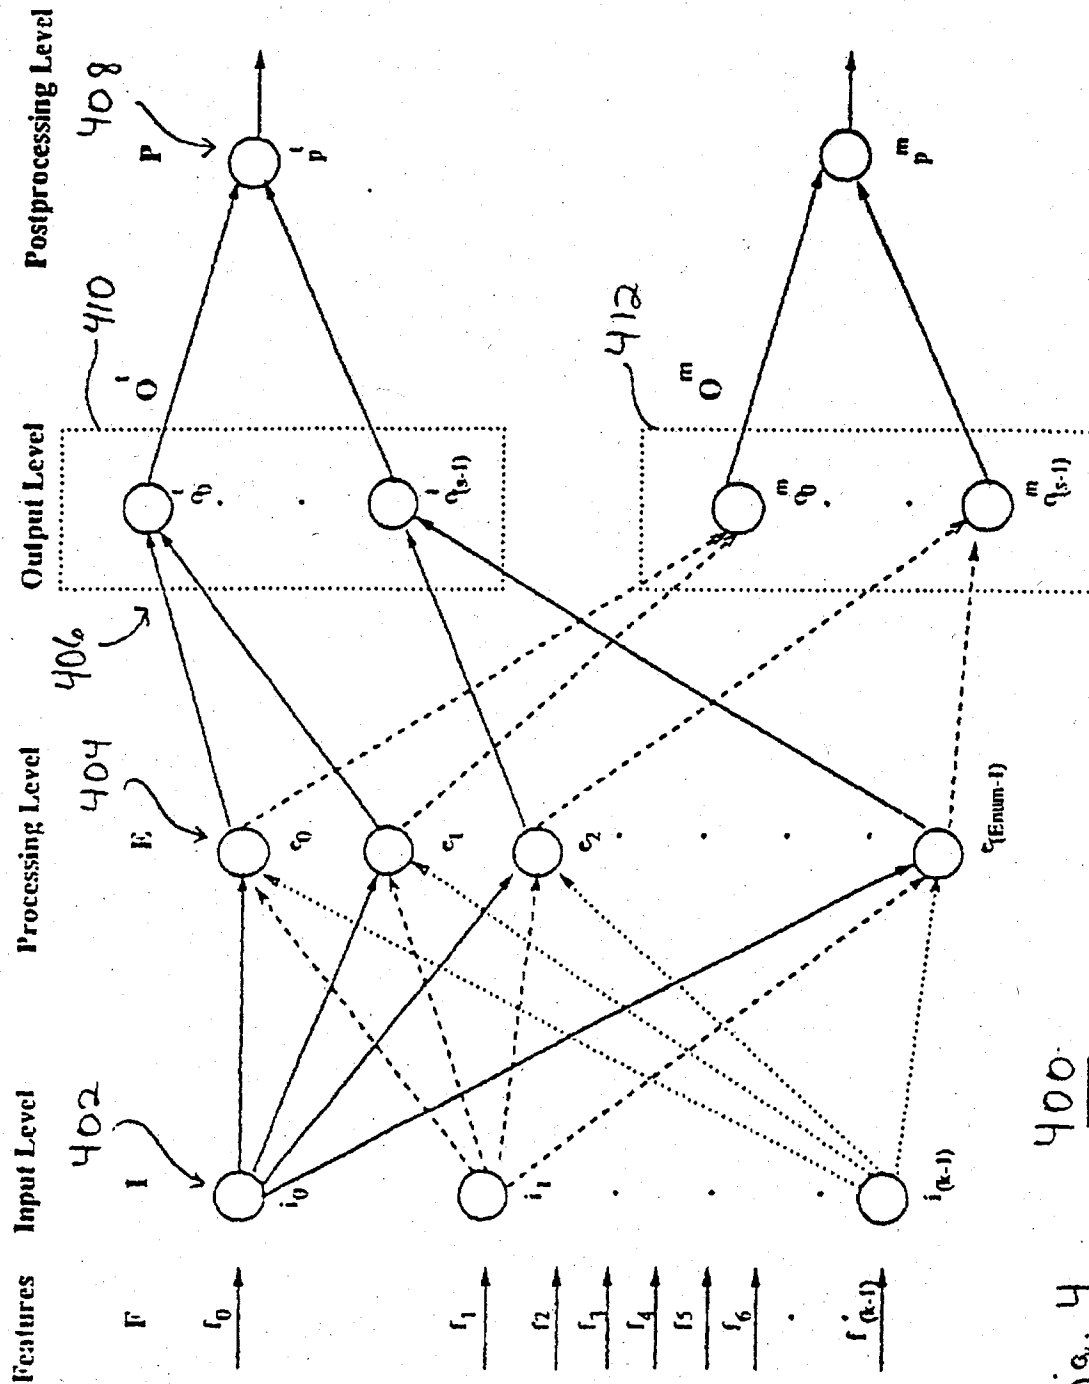


Fig. 4 400

Figure 5

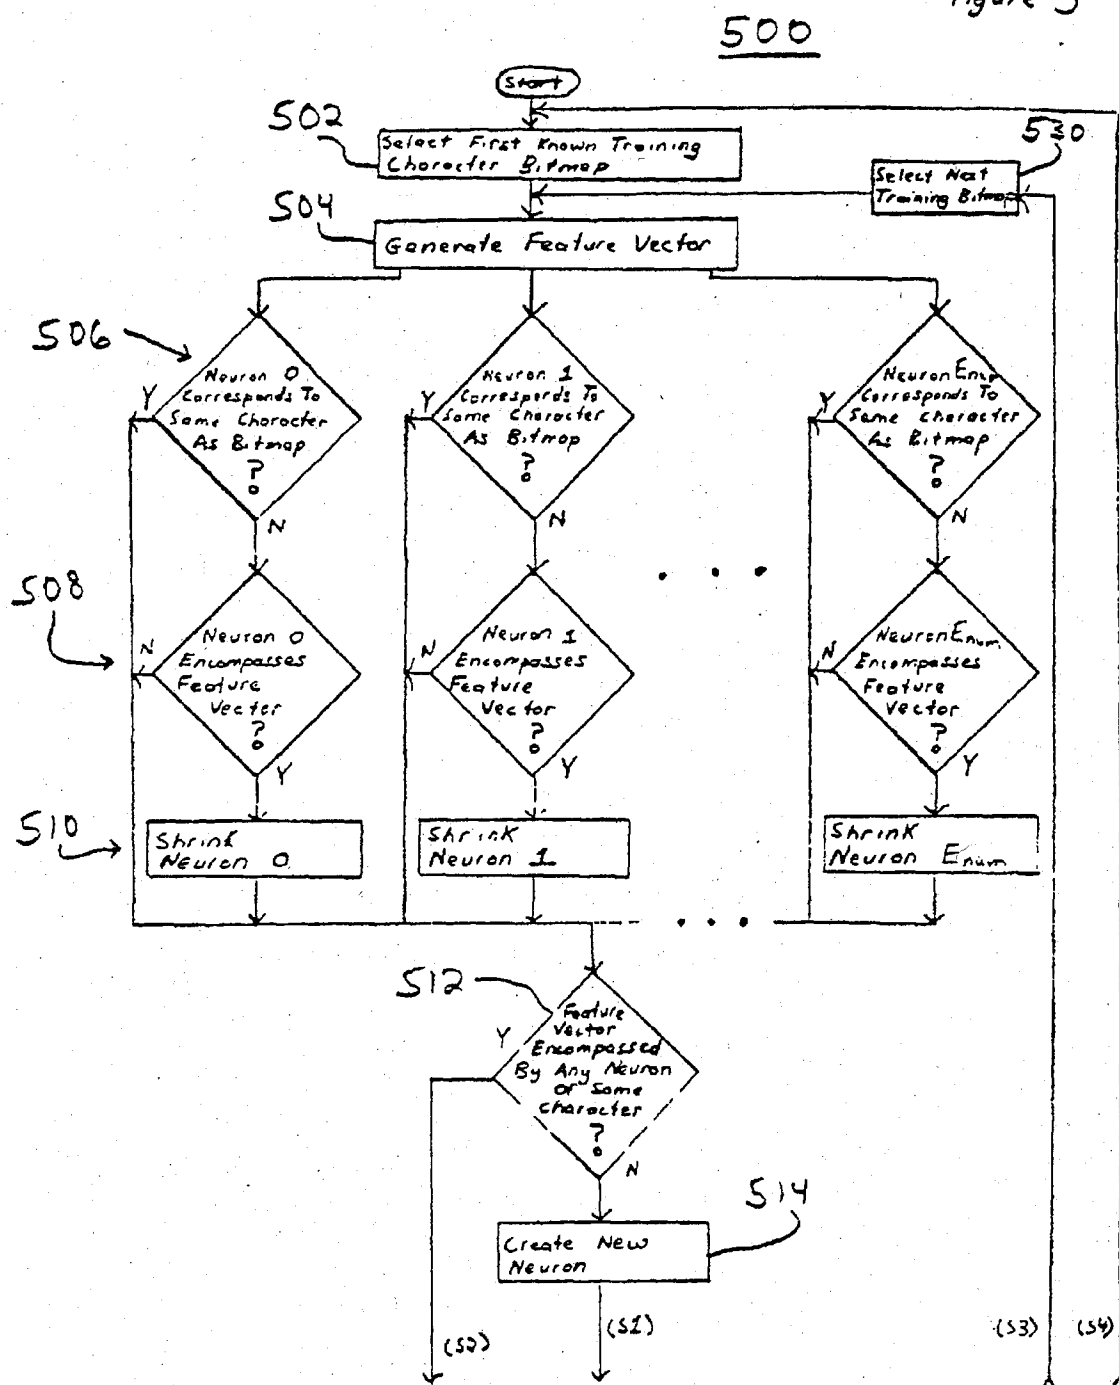


Figure 5 (continued)

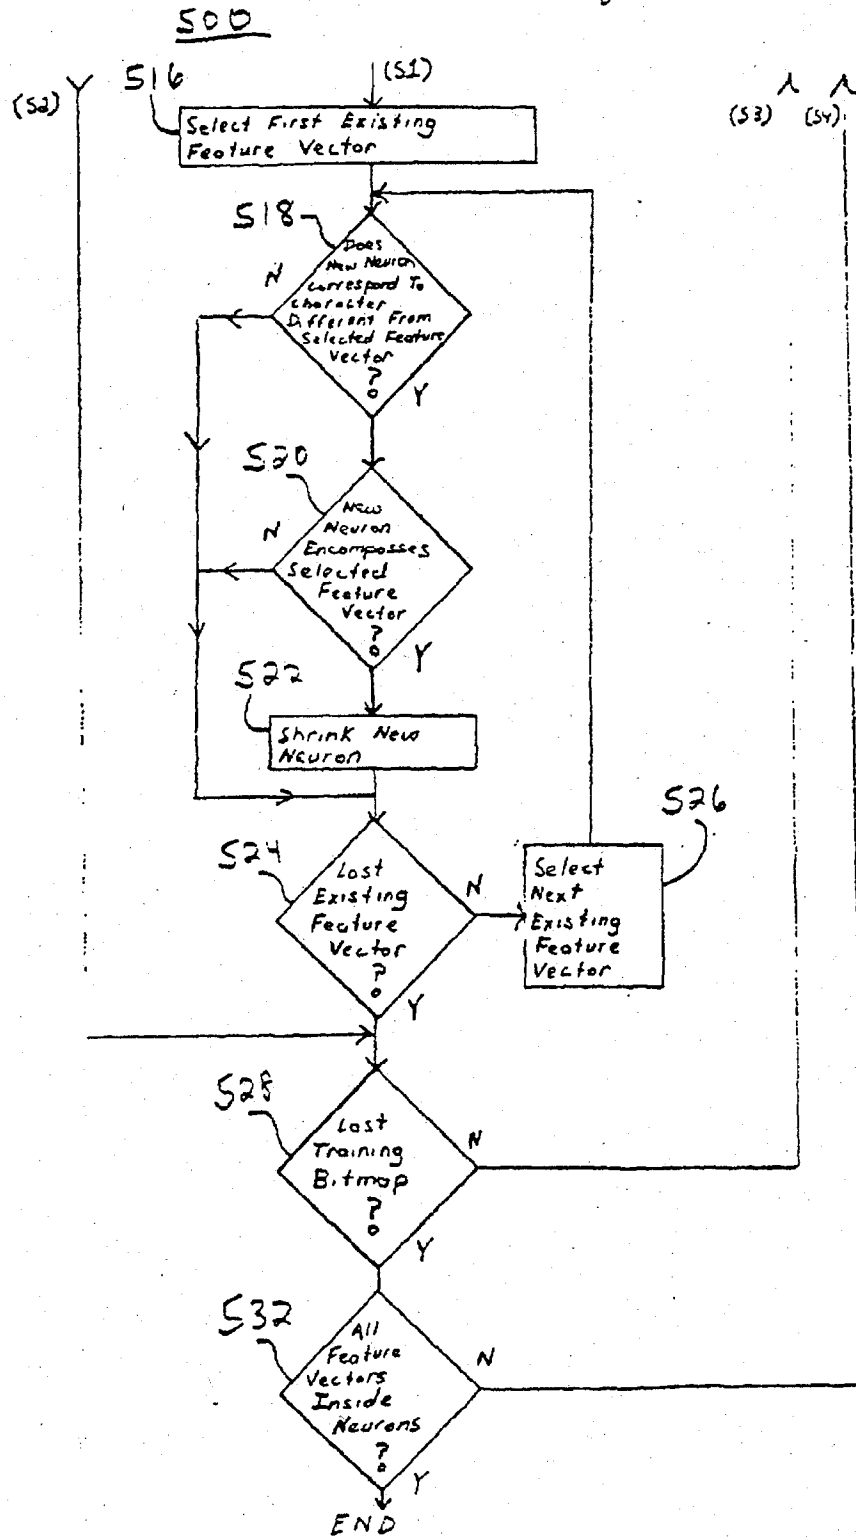


Fig. 6

